




**ENERG**  
енергия · ενεργεια



**NIBE**

NIBE F1126-12



55 °C

35 °C



**A++**

**A++**



**45** dB



dB

■ 13  
■ **13**  
■ 13  
kW

■ 13  
■ **13**  
■ 13  
kW



2015

811/2013



**ENERG**  
енергия · ενέργεια

Y IJA  
IE IA

**NIBE**


NIBE F1126-12 + VPB300




55°C




XXL

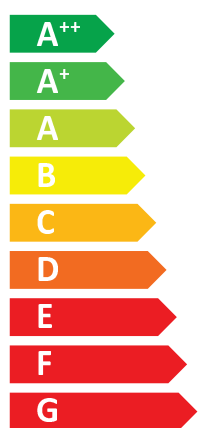

**A++**

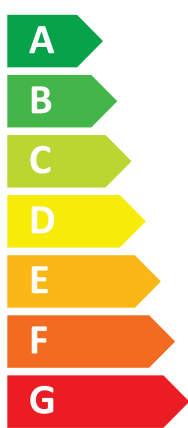

**A**

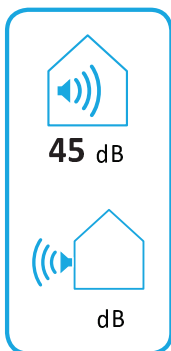

2015

811/2013



# ENERG

енергия · ενεργεια

Y

IJA

IE

IA

**NIBE**

## NIBE F1126-12

 35 °C



**A<sup>++</sup>**

**A<sup>+++</sup>**

**A<sup>++</sup>**

**A<sup>++</sup>**

**A<sup>+</sup>**

**A**

**B**

**C**


**D**

**E**

**F**

**G**

+



+



+



+





# ENERG

енергия · ενέργεια

Y






IJA

IE


IA


**NIBE**


## NIBE F1126-12 + VPB300









XXL

+ 




+ 

+ 



+ 



55 °C


XXL

Supplier's name:	<b>NIBE</b>		
Model:	<b>NIBE F1126-12 (+VPB 300)</b>		
Temperature application	35	55	°C
Declared load profile for water heating	<b>XXL</b>		
Seasonal space heating energy efficiency class, average climate:	<b>A++</b>	<b>A++</b>	
Water heating energy efficiency class, average climate:	<b>A</b>		
Rated heat output, average climate:	13	13	kW
Annual energy consumption for space heating, average climate	5986	7628	kWh
Annual electricity consumption for water heating, average climate	2280		kWh
Seasonal space heating energy efficiency, average climate:	171	133	%
Water heating energy efficiency, average climate:	94		%
Sound power level LWA indoors	45		dB
Rated heat output, cold climate:	13	13	kW
Rated heat output, warm climate:	13	13	kW
Annual energy consumption for space heating, cold climate	6946	8874	kWh
Annual electricity consumption for water heating, cold climate	2280		kWh
Annual energy consumption for space heating, warm climate	3923	4972	kWh
Annual electricity consumption for water heating, warm climate	2280		kWh
Seasonal space heating energy efficiency, cold climate:	177	136	%
Water heating energy efficiency, cold climate:	94		%
Seasonal space heating energy efficiency, warm climate:	169	132	%
Water heating energy efficiency, warm climate:	94		%
Sound power level LWA outdoors	-		dB

### Data for package fiche

Controller class	III		
Controller contribution to efficiency	1,5		%
Seasonal space heating energy efficiency of package, average climate:	173	134	%
Seasonal space heating energy efficiency class for package, average climate:	<b>A++</b>	<b>A++</b>	%
Seasonal space heating energy efficiency of package, cold climate:	178	138	%
Seasonal space heating energy efficiency of package, warm climate:	171	133	%

<b>Model(s):</b>		<b>NIBE F1126-12 (+VPB 300)</b>									
Type of heat source/sink:		Brine-to-water									
Low-temperature heat pump:		No									
Equipped with supplementary heater:		Yes									
Heat pump combination heater:		Yes									
Climate condition:		Average									
Temperature application:		Medium temperature (55 °C)									
Applied standards: EN14825 and EN16147											
<b>Rated heat output</b>		Prated	13,0	kW	<b>Seasonal space heating energy efficiency</b>		$\eta_s$	133	%		
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>							
Tj = -7 °C	Pdh	10,5	kW	Tj = -7 °C	COPd	3,11	-				
Tj = +2 °C	Pdh	11,0	kW	Tj = +2 °C	COPd	3,57	-				
Tj = +7 °C	Pdh	11,2	kW	Tj = +7 °C	COPd	3,87	-				
Tj = +12 °C	Pdh	11,5	kW	Tj = +12 °C	COPd	4,13	-				
Tj = biv	Pdh	10,6	kW	Tj = biv	COPd	3,22	-				
Tj = TOL	Pdh	10,3	kW	Tj = TOL	COPd	2,93	-				
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		-				
Bivalent temperature				T <sub>biv</sub>	-5,2	°C	Operation limit temperature		TOL	-10	°C
Cycling interval capacity for heating				P <sub>cyh</sub>		kW	Cycling interval efficiency		COP <sub>cyh</sub>		-
Degradation co-efficient				Cdh	0,99	-	Heating water operating limit		WTOL	65	°C
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>							
Off mode	P <sub>OFF</sub>	0,002	kW	Rated heat output		P <sub>sup</sub>	2,7	kW			
Thermostat-off mode	P <sub>TO</sub>	0,018	kW	Type of energy input		Electric					
Standby mode	P <sub>SB</sub>	0,007	kW								
Crankcase heater mode	P <sub>CK</sub>	0,03	kW								
<i>Other items</i>											
Capacity control				fixed		Rated air flow rate, outdoors				m <sup>3</sup> /h	
Sound power level, indoors/outdoors				L <sub>WA</sub>	45/-	dB	Rated water flow rate, indoor heat exchanger			1,11	m <sup>3</sup> /h
Annual energy consumption				Q <sub>HE</sub>	7628	kWh	Rated brine or water flow rate, outdoor heat exchanger			2,04	m <sup>3</sup> /h
<i>For heat pump combination heater:</i>											
<b>Declared load profile</b>				<b>XXL</b>		<b>Water heating energy efficiency</b>		$\eta_{wh}$	94	%	
Daily electricity consumption				Q <sub>elec</sub>	10,38	kWh	Daily fuel consumption		Q <sub>fuel</sub>		kWh
Annual electricity consumption				AEC	2280	kWh	Annual fuel consumption		AFC		GJ
<b>Approved by:</b>											
<b>Contact details</b>		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden									